



BE GREEN WITH USER® SCREENS

# **US-FX Series Common Cathode Outdoor Full Color LED Display**

960×960×120mm Specification

# Catalogue

Chapter 1 Product Introduction .....	2
Chapter 2 Structural Appearance .....	4
2.1 Module Pictures .....	4
2.2 Cabinet Pictures .....	4
2.3 Technical Parameters .....	5
2.4 Packing List .....	6
2.5 Power Supply Configuration Project .....	6
2.6 Accessories .....	6
Chapter 3 Interface Definition .....	7
3.1 Interface Picture (HUB75) .....	7
3.2 Interface Definition .....	7
Chapter 4 Installation .....	8
4.1 Kit Installation .....	8
4.2 Cabinet Installation .....	8
4.3 Cabinet structure .....	9
4.4 Display Installation .....	10
4.5 Networking Introduction .....	10
4.6 Installation Method .....	11
Chapter 5 User Manual .....	12
5.1 Notification .....	12
5.2 User Manual .....	12
5.3 Acceptance Request and Method .....	13
Chapter 6 Application Field .....	14

# Chapter 1 Product Introduction

- **Common Cathode with Energy-Saving**

Common cathode is an energy-saving power supply technology for LED display, which can effectively solve the problems of high screen temperature and excessive power consumption of common anode circuit. The average temperature of the panel of the common cathode circuit is 15°C lower than that of the traditional common anode circuit, and the power consumption is reduced by more than 20%.

- **Four-level energy-saving technology**

Class I dynamic energy saving: when the signal is not displayed, turn off the driving circuit of the constant current tube chip;

Level II black screen energy saving: when the display screen is completely black, the static consumption current of the chip drops from 6mA to 0.6mA;

Level III full-screen energy saving: when the low level is maintained for 300ms, the static consumption current of the chip drops from 6mA to 0.5mA;

Class IV shunt power supply and step-down energy saving: the current first passes through the lamp bead, and then goes to the negative electrode of the IC, so that the forward voltage drop becomes smaller and the on-resistance becomes smaller.

- **High Refreshing, High Grayscale.**

Its refreshing ratio can be up to 3840Hz, grayscale is up to 16bit, picture display is lifelike, smooth, brightness is stable and even, no flicker, no "particle" sense.

- **Stable and high protection**

Outdoor application products, IP65 protection grade, low power consumption, low temperature rise, flame retardant and fireproof, good heat dissipation effect, no need to install air conditioners.

- **Reasonable structure design**

98 304 stainless steel electroplating screws, better flatness, no modularization, standard hole position of general box;


- **Safe and easy to maintain**

Low-voltage switching, support live plugging, easy to replace unit modules, rear Maintenance, fast and convenient.

## Chapter 2 Structural Appearance

### 2.1 Module Pictures

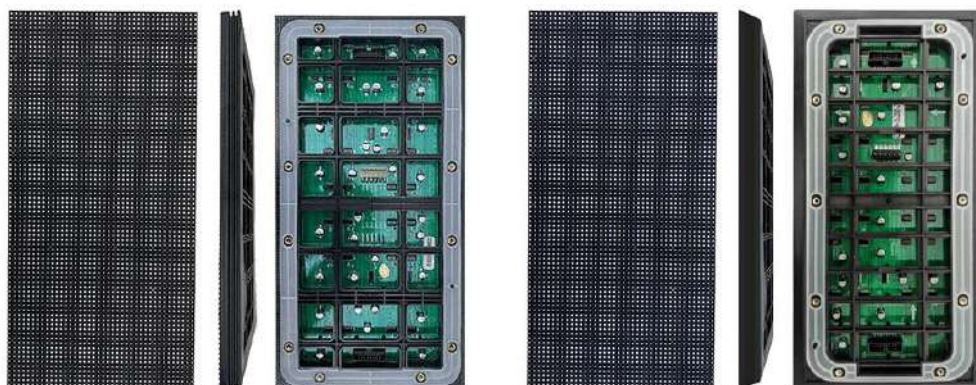Picture 2-1 Display modules(320\*160\*14mm)



### 2.2 Cabinet Pictures

Picture 2-2 Cabinet(960\*960\*120mm)



Standard Iron cabinet

Waterproof iron cabinet

Die-casting aluminum cabinet

## 2.3 Technical Parameters

Table 2-1 Technical Parameters (Common Cathode)

Item	US-FX2.5	US-FX3.076	US-FX4	US-FX5	US-FX10
Pixel Composition(SMD)	1921	1921	1921	1921/2727	2727
Pixel Pitch(mm)	2.5	3.076	4	5	10
Module Resolution(W×H)	128×64	104×52	80×40	64×32	32×16
Module Size(mm)	320×160×14				
Module Weight(kg)	0.45				
Module Qty/Cabinet(W×H)	3×6				
Cabinet Resolution(W×H)	384×384	312×312	240×240	192×192	96×96
Cabinet Size(mm)	960×960×120				
Cabinet Area(m <sup>2</sup> )	0.92				
Cabinet Weight(kg/cabinet)	35 / 28.5				
Cabinet Material	Iron cabinet / Die-casting aluminum cabinet				
Cabinet Density (dot/m <sup>2</sup> )	160000	105625	62500	40000	10000
IP Rating	IP65				
White Balance Brightness(nits)	≥5000	≥5000	≥5000	≥5000	≥6500
Color Processor(bit)	16				
Color Temperature(K)	6500-9000				
Visual Angle(H/V)	140°/ 120°				
Luminous point centre deviation	<3%				
Luminance uniformity	≥97%				
Chromaticity uniformity	Within ±0.003Cx, Cy				
Contrast Ratio	≥8000:1				
The Max Power Consumption(W/m <sup>2</sup> )	550	550	550	550	600
Average Power Consumption(W/m <sup>2</sup> )	185	185	185	185	200
Input Voltage	AC100~240V				
Frequency(Hz)	50&60				
IC Driving(s)	1/16	1/13	1/10	1/8	1/2
Refreshing Ratio(Hz)	3840				
Maintenance Method	Rear				
Lifespan(hrs)	100,000				
Work Temperature/Humidity	-10℃-50℃/10%RH-98%RH (Non Condensing)				
Storage Temperature/Humidity	-20℃-60℃/10%RH-98%RH (Non Condensing)				

\*Note: Maximum power consumption fluctuates by 10% depending on the batch of LED chips, and specifications are subject to change without notice.

## 2.4 Packing List

Table 2-2 Packing List

Packing List	Quantity	Unit
LED Display	1	Set
User Manual	1	pcs
Approved Certificate	1	pcs
Warranty Card	1	pcs
Construction Notification	1	pcs





## 2.5 Power Supply Configuration Project

Table 2-3 Supply Configuration Project

Power Supply	Configuration Project
300/400W Power Supply	Can load 4pcs modules

## 2.6 Accessories


Table 2-4 Accessories List

Accessories		
		
Power Supply	Single Cable	Screws, connecting sheet, Sleeve Piece
		
Key		

## Chapter 3 Interface Definition

### 3.1 Interface Picture (HUB75)

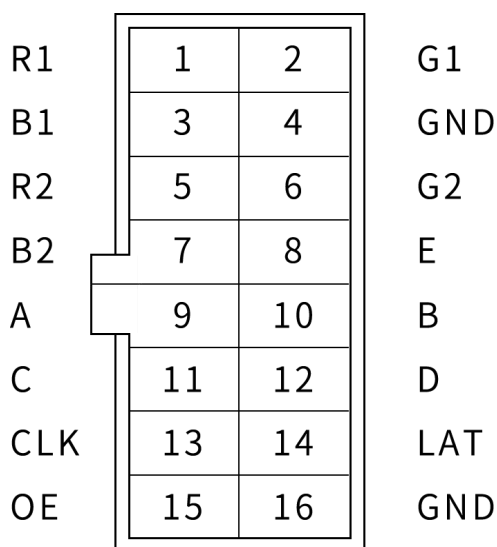Picture 3-1 Interface Picture (HUB75)



### 3.2 Interface Definition

Table 3-1 Interface Definition


Pin	Signal	Function	Pin	Signal	Function
1	R1	Red Data Signal	2	G1	Green Data Signal
3	B1	Blue Data Signal	4	GND	Power Ground
5	R2	Red Data Signal	6	G2	Green Data Signal
7	B2	Blue Data Signal	8	E	Row Decoding Signal
9	A	Row Decoding Signal	10	B	Row Decoding Signal
11	C	Row Decoding Signal	12	D	Row Decoding Signal
13	CLK	Clock Signal	14	LAT	Latch Signal
15	OE	Enable Signal	16	GND	Power Ground





### 4.3 Cabinet structure

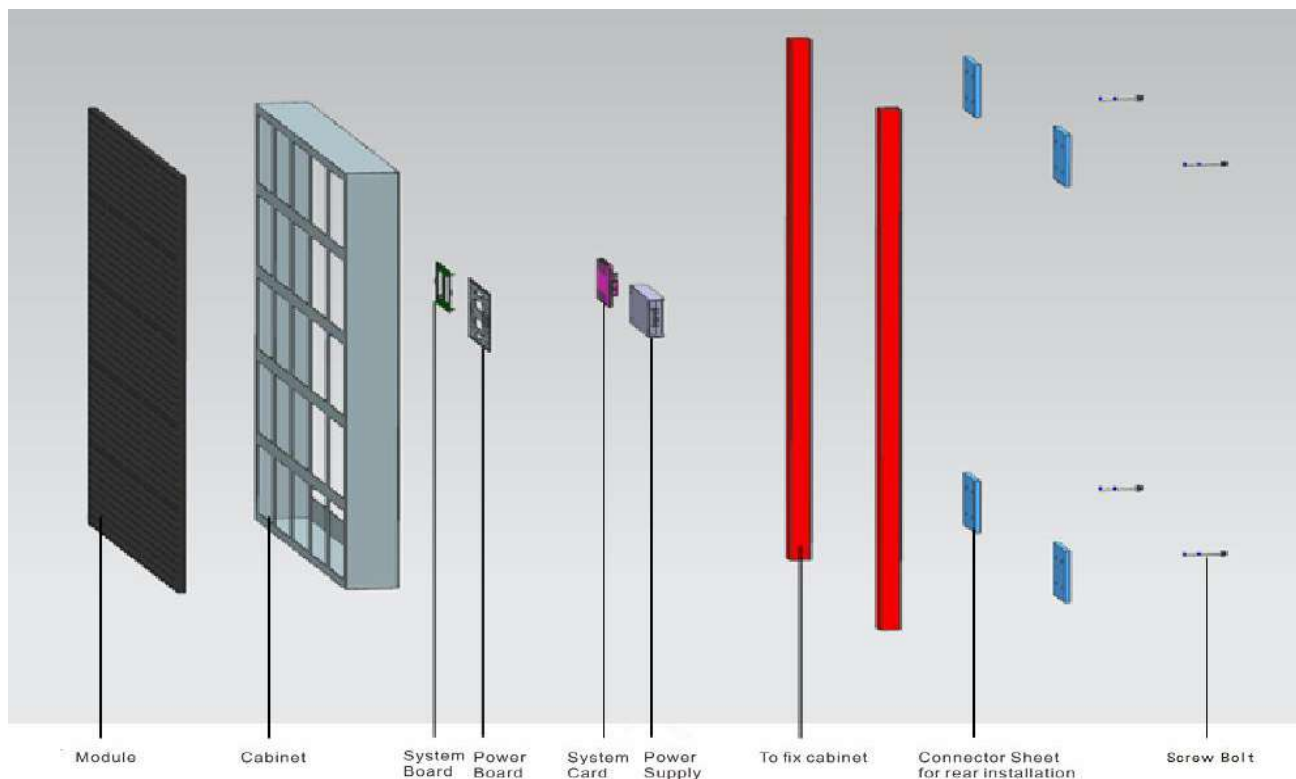Picture 4-3 Cabinet structure




Picture 4-4 After finishing to install for cabinet




## 4.4 Display Installation

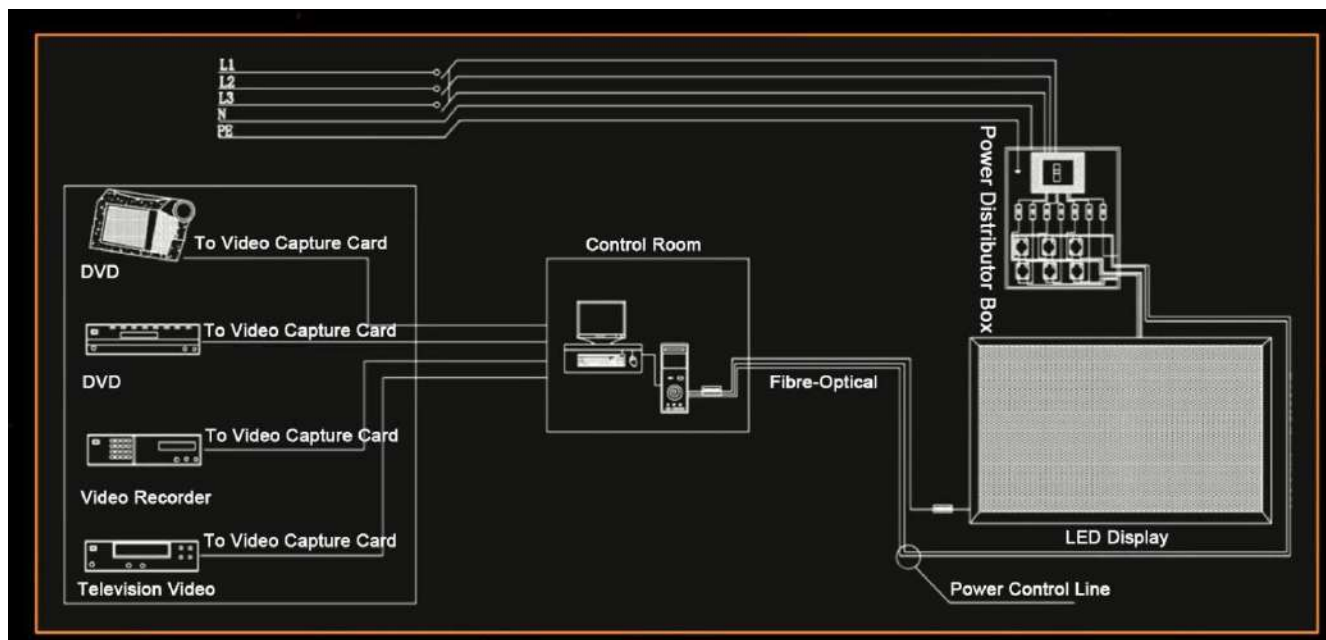Picture 4-5 Diagram for Connection









## 4.5 Networking Introduction

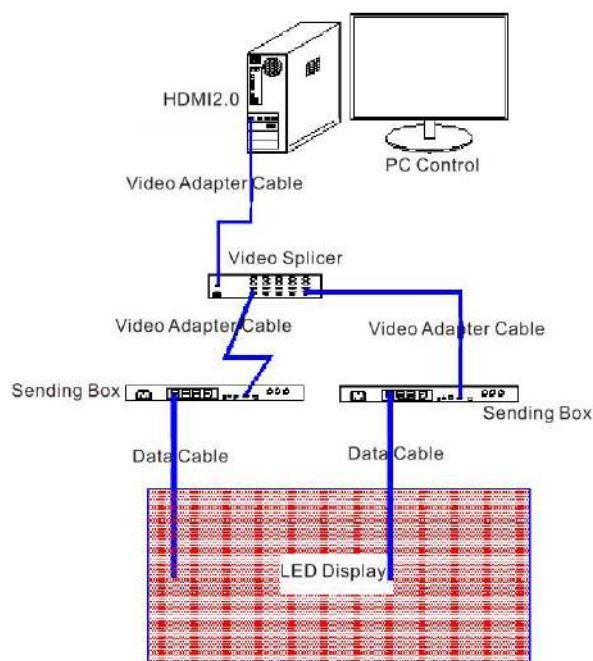Picture 4-6 Topographic Picture for networking



## 4.6 Installation Method

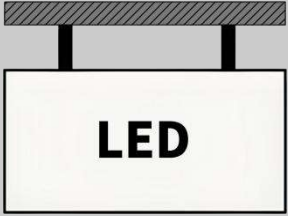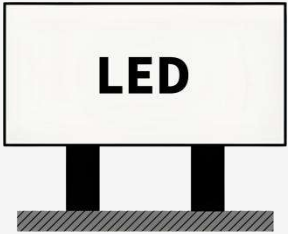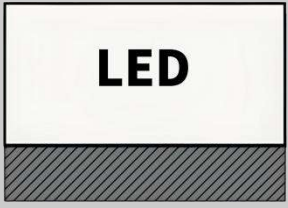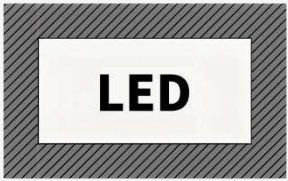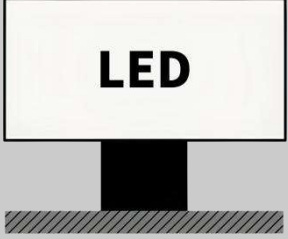Installation Type	Picture
Hanging Style	
Supporting Style	
Landing Style	
Inlaying Style	
Struting Style	
Wall-attaching Style	

## Chapter 5 User Manual

### 5.1 Notification

Table 5-1 Notification

Item	Notification
Temperature	Keep the work temperature within $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$
Humidity	Keep the storage temperature within $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$
Waterproof	Keep the work humidity within 10%RH~98%RH
Dust-proof	Keep the storage humidity within 10%RH~98%RH
Anti-Electromagnetic radiation	IP66
Electrostatic Prevention	IP66
Temperature	LED display shouldn't put under the environment where has strong interference by electromagnetic radiation, which would be easy to picture display abnormal.
Humidity	It should be ground connected well for power supply, cabinet, mental cover of display body, the resistance of ground connection $<10\Omega$ , to avoid making any damage to electric components.

### 5.2 User Manual


Table 5-2 User Manual

Item	User Manual
Electrostatic Protection	The installer need wear electrostatic ring and electric gloves, each equipment should take ground connection well when installing.
Connection Type	There are positive and negative electrode silk printed on module, don't allow to reverse connect, and prohibit to connect with AC 220V.
Operate Type	Prohibit to assemble module, cabinet and whole of display under power on, operation should be under power off completely, to protect personal safety; Prohibit anyone to touch when the LED display is working, in case the static electricity which is generated by body to break through LED and other components.
Dismantle and Transportation	Don't allow to throw, push, compress module, to prevent module falling down, to avoid breaking kit, damage LED chips, etc.

Item	User Manual
Environmental Inspection	It should match temperature and humidity meter for LED display at installation site, to monitor its surrounding environment, so that it can find out if LED display being affected with damp, moisture, etc.
The Usage of LED display	<p>1.The environmental humidity should be 10%RH~65%RH, it is suggested to turn on LED display one time each day, normal to use above 4 hours each time, to remove its damp.</p> <p>2.When the environmental humidity is above 65%RH, it should make dehumidification to environment, and it is suggested to work LED display above 8h each day.</p> <p>3.When LED display has not turned on for a long time, it should preheat LED display to remove moisture before use, to avoid damage LED because of damp, the specific method: 20% brightness to work for 2h, 40% brightness to work for 2h, 60% brightness to work for 2h, 80% brightness to work for 2h, 100% brightness to work for 2h, by this to gradually increase its brightness.</p>

## 5.3 Acceptance Request and Method

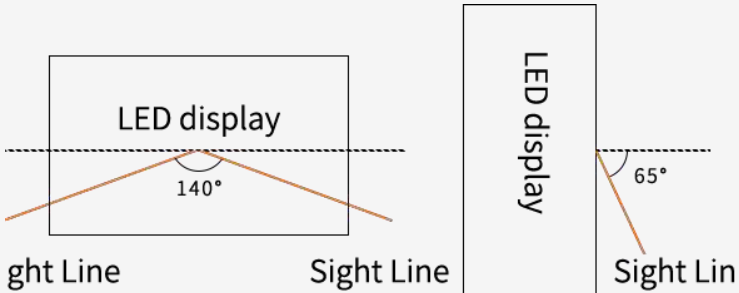Table 5-3 Acceptance Request and Method for LED display

Item	Acceptance Request and Method
Brightness of LED Display	Switch LED display to work as full brightness, use light-gun to measure the brightness of LED display within 10 minutes. When measuring its brightness, the light-gun need be vertical to LED display, to adjust the distance of light-gun and LED display, ensure the view window, black area, cover above 16 pixels, adjust focal length, to ensure LED chip being able to clearly view in eyepiece, then measure and record brightness data.
Visual Angle	<p>The one should stand on the angle of 140°, bottom angle 65°to LED display when making measurement, it is requested that LED display should not have obvious the problem of dark block.</p> 

## Chapter 6 Application Field

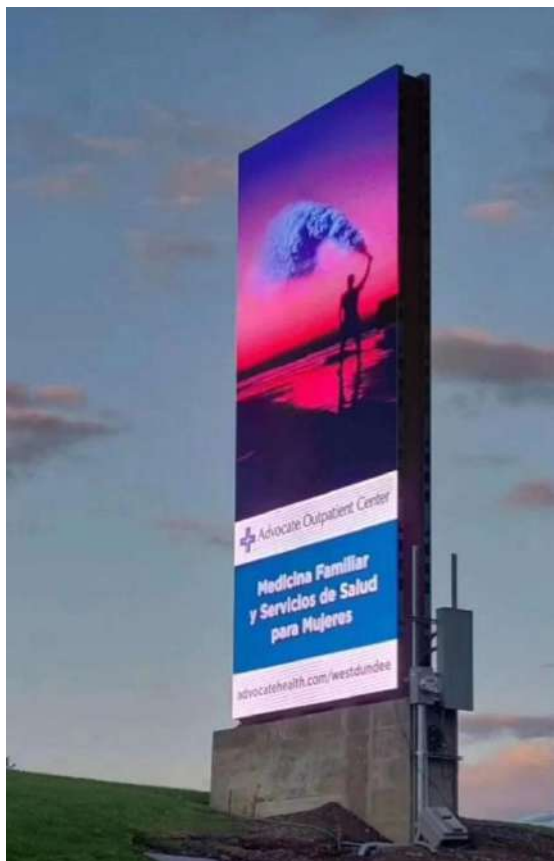
It is widely used for various of outdoor application fields, such as the exterior wall of building, Hanging Garden, Government Cultural Plaza, Bus Station, Vertical Advertising aside road, etc.



Zhengzhou University double-sided aluminum screen (220m<sup>2</sup>)



Jiangyin Gymnasium Aluminum Screen (280m<sup>2</sup>)



Double-sided aluminum screen in Houston, USA (180m<sup>2</sup>)



Aluminum screen on the west side of Sokcho Coast, Gangwon-do, South Korea (90m<sup>2</sup>)



Aluminum screen on the south side of Sokcho coast, Gangwon-do, South Korea (150m<sup>2</sup>)